

Goldhofer

GOLDHOFER FTV



SPECIAL APPLICATIONS

FTV 930 SAFE AND PROVEN

YOUR BENEFITS

- ✓ Display for essential application parameters
- » Safe and reliable operation
- ✓ Installed between the modular chassis to reduce the total height
- » Very low center of gravity for increased safety
- ✓ Closed working platform
- » Safety at work when attaching the blades

TECHNICAL FEATURES

- + Raised maximum angle 60°
- + Pitch angle Endless
- + Maximum rotor blade diameter 3,700 mm
- + Dead weight 19.6 t
- + Ballast weight 18 t
- + Load moment 930 mt




**SAFE AND RELIABLE
OPERATION**




HIGH AGILITY



**COMBINATION WITH
EXISTING MODULE
FLEET**

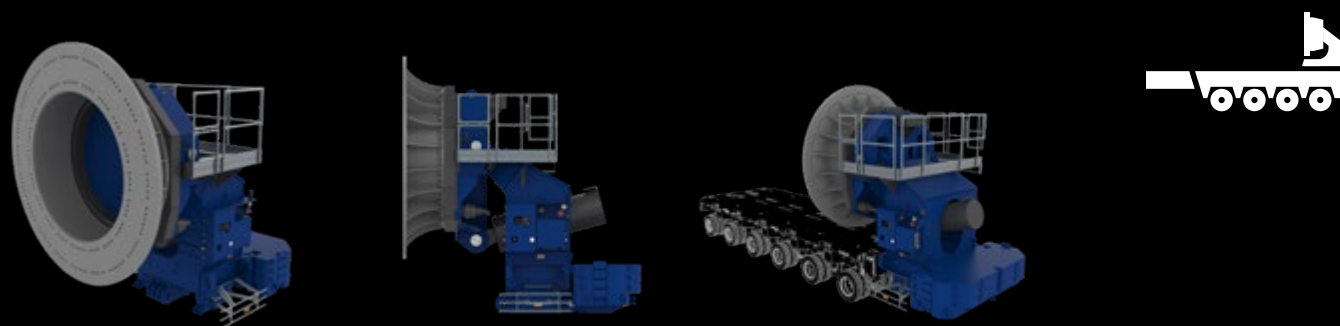

SPECIAL APPLICATIONS

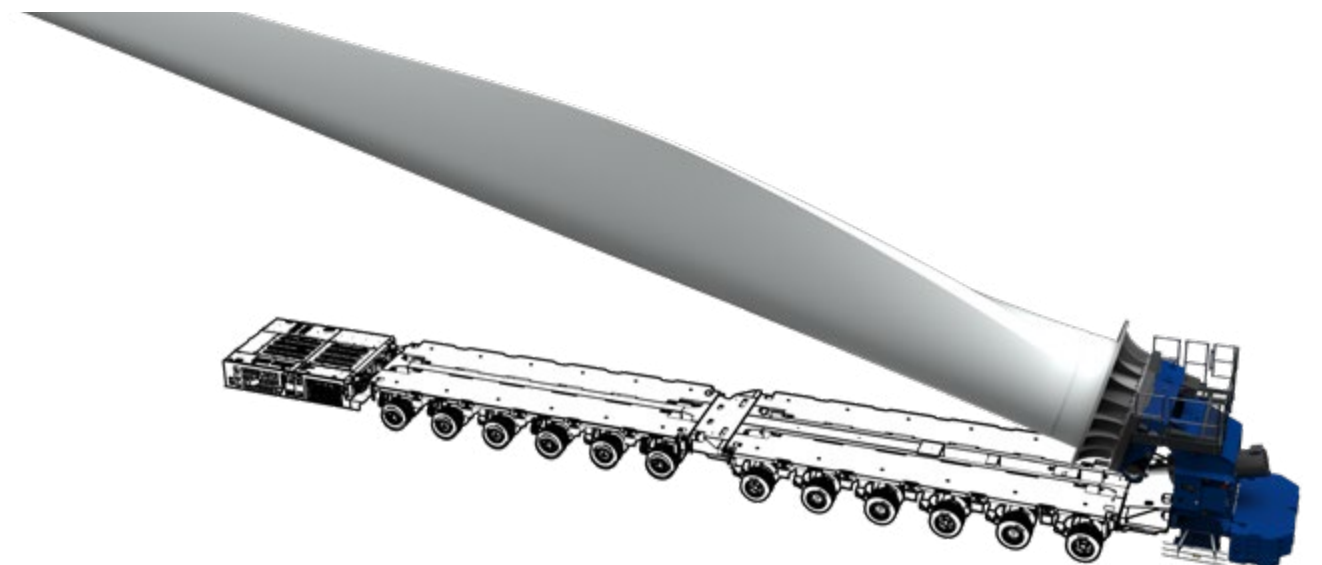

INDIVIDUAL SOLUTIONS WITH MAXIMUM SAFETY AND STABILITY

Depending on the job on hand, a wide range of options is available with adapters for various parallel combinations. This makes the FTV 930 ideally suited for transporting extra-long rotor blades which are used for turbines on sites with low wind speeds. Even the latest generation of rotor blades requiring a lifting torque of up to 930mt can be picked up and transported with full flexibility in the towed or self-propelled mode. With the split-combination option, in particular the PST/SL-E split with driven axle lines and mounting behind the loading area, the FTV 930 offers extremely high stability combined with low ballast weight. In addition, fewer axle lines are needed in operation, which increases the manoeuvrability of the combination and reduces the dead weight.

FTV 1150

THE NEW GENERATION

YOUR BENEFITS

- ✓ Display for essential application parameters
- » Safe and reliable operation
- ✓ Installed between the modular chassis to reduce the total height
- » Very low center of gravity for increased safety
- ✓ Closed working platform
- » Safety at work when attaching the blades

TECHNICAL FEATURES

- + Raised maximum angle 60°
- + Pitch angle Endless
- + Maximum rotor blade diameter 3,700 mm
- + Dead weight 25.3 t
- + Ballast weight 17.9 t
- + Load moment 1.150 mt




SAFE AND RELIABLE OPERATION




HIGH FLEXIBILITY



COMBINATION WITH EXISTING MODULE FLEET

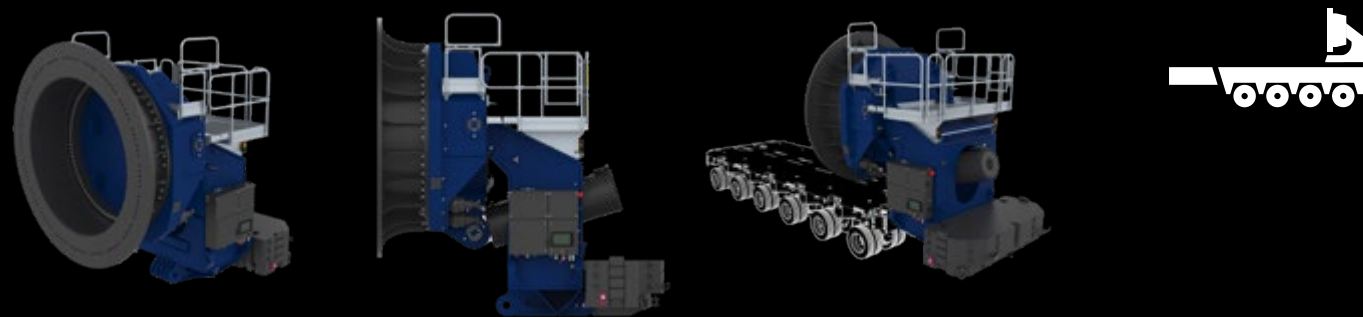

SPECIAL APPLICATIONS

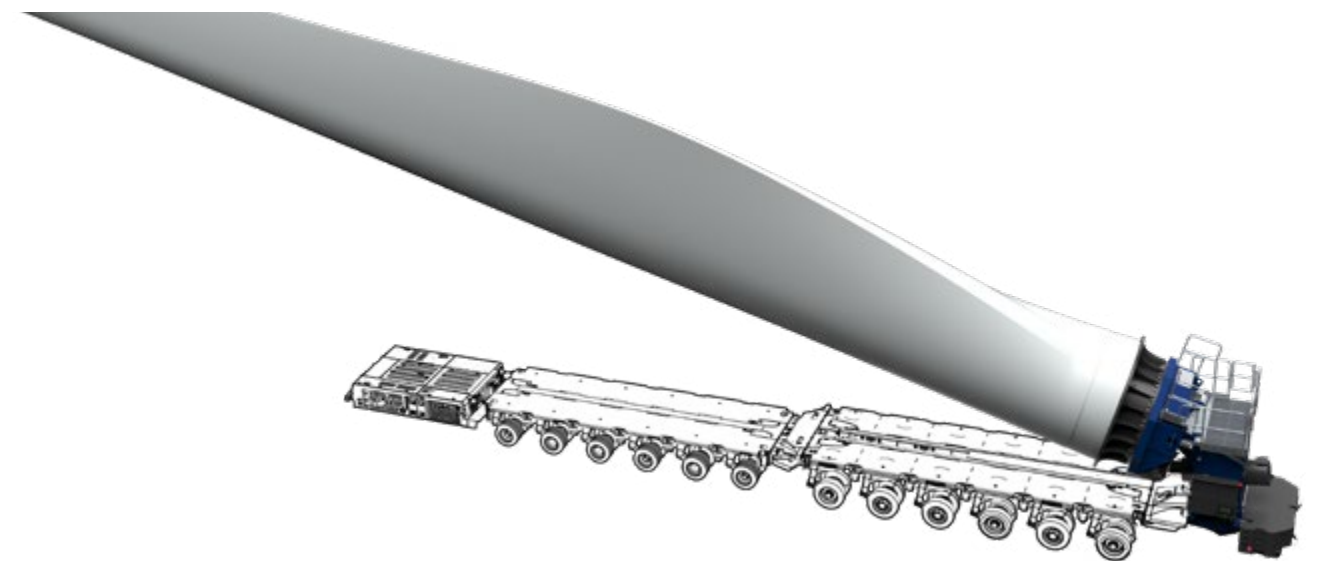

STABILITY REDEFINED

The FTV 1150 and the PST/SL-ES (285) are a perfect match. While the fifth generation of the FTV enables the transport of the latest generation of rotor blades, the PST/SL-ES (285) provides the necessary stability while maintaining high manoeuvrability. This opens up new routes, reduces effort, and increases the profitability of every project.




FTV 930 / FTV 1150

TECHNICAL DATA

	FTV 930	FTV 1150
Dead weight	19.6 t	25.3 t
Ballast weight	18 t	17.9 t
Load moment	930 mt	1,150 mt
Raised maximum angle	60°	
Pitch angle	endless	
Rotor Blade Adaptor	Dead weight 4.4 - 6 t for diameter up to 3,700 mm	

- + Wind measuring on the blade tip
- + Remote radio control with axle pressure indicator and wind indicator
- + Railing for safe work on the adaptor
- + Access ladder

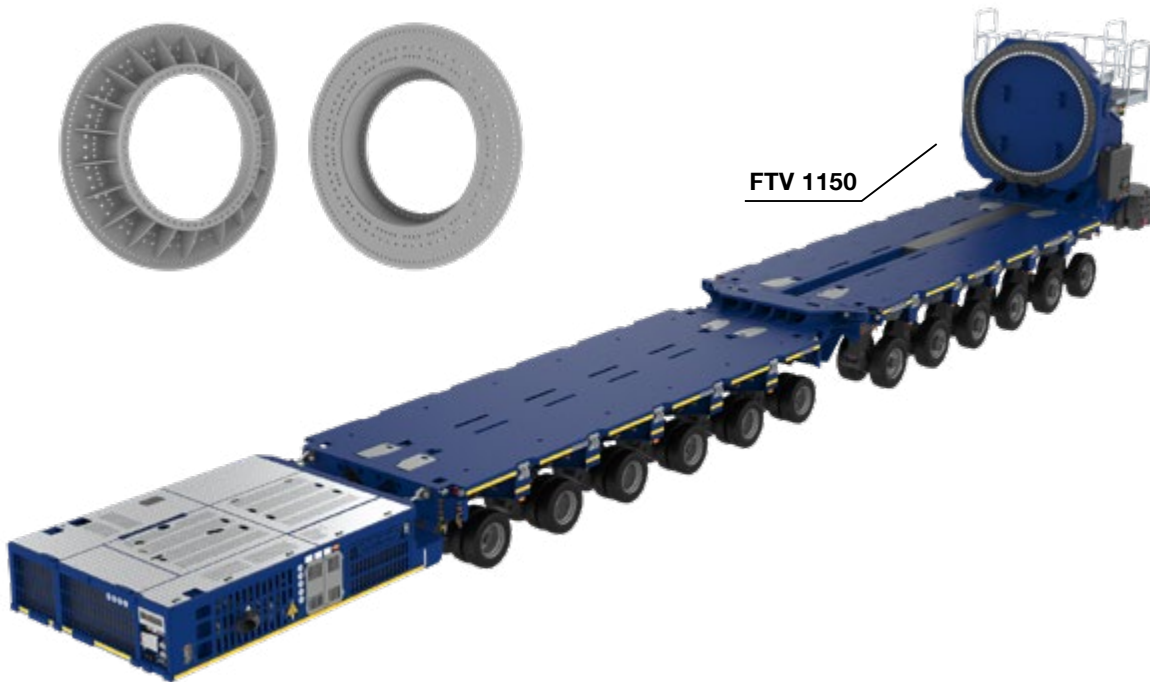

CONTACT TRANSPORT TECHNOLOGY

GOLDHOFER AKTIENGESELLSCHAFT

Donaustrasse 95, 87700 Memmingen/Germany
Telephone: +49 8331 15-0
Web: www.goldhofer.com, E-Mail: info@goldhofer.com

SALES

Telephone Sales Europe: +49 8331 15-341
Telephone Sales International: +49 8331 15-342
E-Mail: sales-transport@goldhofer.com

SERVICES AND SPARE PARTS

Technical Support:

Telephone: +49 8331 15-400
E-Mail: service-transport@goldhofer.com

Spare Parts:

Telephone: +49 8331 15-971
E-Mail: parts@goldhofer.com