

Goldhofer



SELF-TRACKING DOLLY FOR LONG MATERIAL



SPECIAL APPLICATIONS

SELF-TRACKING DOLLY

LIGHTWEIGHT, FLEXIBLE & ECONOMICAL

YOUR BENEFITS

- ✓ Low overall weight and less fuel consumption
- » Reduced overall transport costs
- ✓ Turntable steering angle +/- 100°
- » High agility, especially when maneuvering
- ✓ Transports of different loads with >70 t payload possible
- » Flexible, future-proof transport solution
- ✓ High ground clearance below the load
- » Easy negotiation of obstacles on the route



**LOW OVERALL
WEIGHT**




HIGH AGILITY




**MULTIPLE
COMBINATIONS
POSSIBLE**

POSSIBLE AXLE COMBINATIONS

0+4 / 2+4 / 2+5 / 3+5

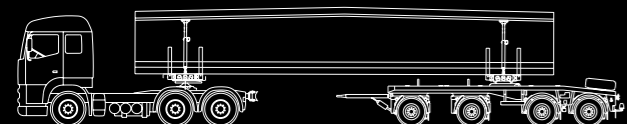


SN-L 4 (285)

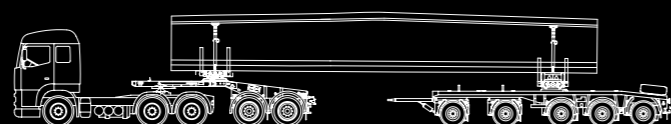


SXU-L 2 (315)

SN-L 5 (285)

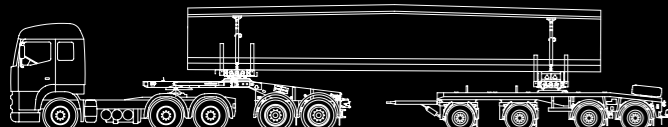

SXU-L 2 (315)

SN-L 4 (285)

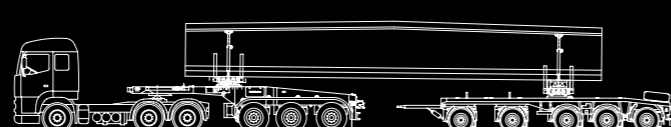

SXN-L 3 (315)

SN-L 5 (285)



TECHNICAL DATA

| | SXU-L 2 ⁽¹⁾ | SXN-L 3 | SN-L 4 ⁽²⁾ | SN-L 5 ⁽²⁾ |
|--|---|---|---|---|
| Axle load <i>(depending on country-related regulations)</i> <i>(technical)</i> | 10 - 12 t at 80 km/h 12 t at 80 km/h | 10 - 12 t at 80 km/h 12 t at 80 km/h | 10 - 12 t at 80 km/h 12 t at 80 km/h | 10 - 12 t at 80 km/h 12 t at 80 km/h |
| Axle stroke | 200 mm (+/- 100 mm) | 200 mm (+/-100 mm) | 190 mm (+105/-85 mm) | 190 mm (+105/-85 mm) |
| Tires | twin tires 315/80 R 22.5 | twin tires 315/80 R 22.5 | twin tires 285/70 R 19.5 | twin tires 285/70 R 19.5 |
| Vehicle width | 2,550 mm | 2,550 mm | 2,550 mm | 2,550 mm |
| Axle spacing | 1,310 mm | 1,310/1,410 mm | 1,800/2,100/1,400 mm | 1,800/1,900/1,400/ 1,400 mm |
| Number of axles | 2 | 3 | 4 | 5 |



ACCESSORIES & OPTIONS

- + SXU-L 2 with ball bearing slewing ring or with fifth wheel
- + Long material table with spindle-adjustable stake pockets stanchion pockets
- + Inclined stanchions
- + Stanchions and tensioning chains
- + Trailer coupling on dolly for empty travel with trailer
- + Push coupling at the rear of the trailer
- + Tow bar
- + Support bracket for height equalization between dolly and trailer
- + Connecting cables
- + Spare wheel holder
- + Working lights
- + Central lubrication system

CONTACT TRANSPORT TECHNOLOGY

GOLDHOFER AKTIENGESELLSCHAFT

Donaustrasse 95, 87700 Memmingen/Germany
Tel.: +49 8331 15-0, Fax: +49 8331 15-239
Web: www.goldhofer.com, E-Mail: info@goldhofer.com

SALES

Telephone Sales Europe: +49 8331 15-341
Telephone Sales International: +49 8331 15-342
E-Mail: sales-transporttechnology@goldhofer.com

SERVICES AND SPARE PARTS

Telephone: +49 8331 15-400, Fax: +49 8331 15-247
Emergency Hotline: +49 172 837 61 65
E-Mail: service-transporttechnology@goldhofer.com