


# TRAFFIDECK™ GO LIGHTWEIGHT AND FLEXIBLE



## YOUR BENEFITS


- ✓ 6-8mm height
  - » More loading height than conventional rubber plates
- ✓ 8,8 kg/qm<sup>2</sup> weight
  - » Increased payload due to the lower total weight of the TRAFFIDECK™ GO coating
- ✓ Easy to clean and repair
  - » Easy cleaning with water and a broom, if necessary, easy to repair via Repair-Kit
- ✓ Flexible and easy to use
  - » No annoying handling
  - » Highly resistant to environmental influences and environmentally friendly to dispose
- ✓ High friction coefficient ensures optimal load securing
  - » Additional sanding ensures safety in all weather conditions

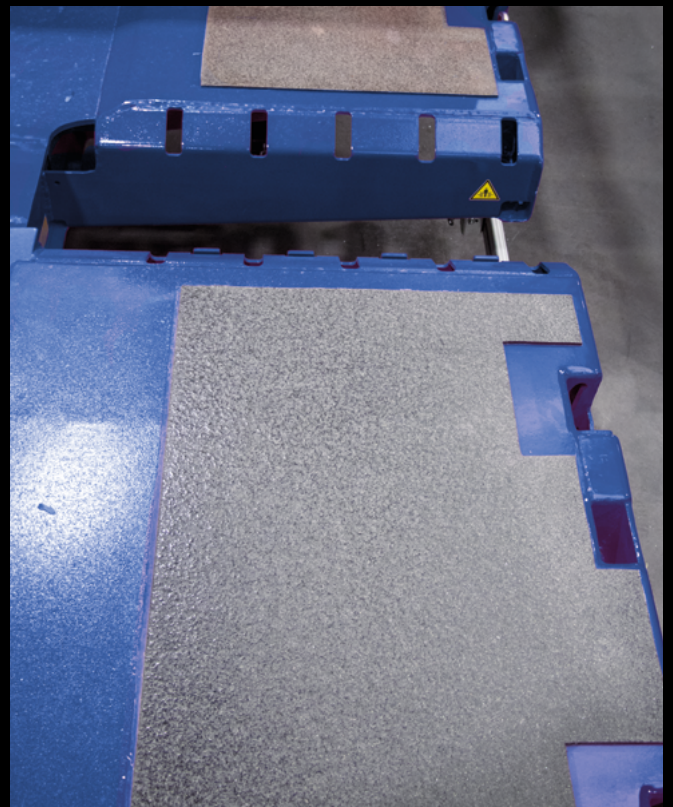

### SALES

Telephone Sales Europe: +49 8331 15-341  
Telephone Sales International: +49 8331 15-342  
E-Mail: [sales-transporttechnology@goldhofer.com](mailto:sales-transporttechnology@goldhofer.com)

MADE FOR YOUR MISSION

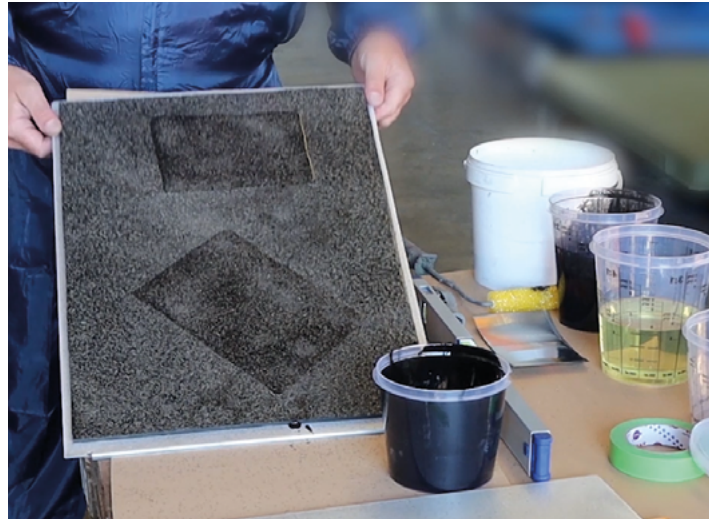

## REPAIR-KIT INSTRUCTIONS

- » Balancing and cleaning of the damaged area
- » Open bins and mix liquids in a separate can (1:1)
- » Mixture of the liquids for at least 30 seconds
- » Application of the mixture on the damaged area
- » Remove excess mixture if needed
- » Sanding of the area after approx. 20 seconds
- » Allow surface to harden for approx. 1 h (36 h for full load capacity)



### SALES

Telephone Sales Europe: +49 8331 15-341  
Telephone Sales International: +49 8331 15-342  
E-Mail: sales-transporttechnology@goldhofer.com

**MADE FOR YOUR MISSION**